



## PC2150/31 SPECIFICATIONS


### BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery pure lead VRLA
- BCI Group 31 footprint
- Rugged construction
- 9.5 mm corrosion-free stud terminal; brass SAE terminal optional
- Can be mounted in any orientation except inverted. In order to meet group 31 specifications (hold-down), battery must remain upright
- Suitcase lifting handle
- US DOT and IATA certified non-spillable
- Shipped fully charged - just install and go!
- Container and cover made from oil resistant plastic
- Optional metal jacket

### PERFORMANCE FEATURES


- PHCA: 2,150A at 80°F (27°C); for 5 seconds
- PCCA: 1,500A at 0°F (-18°C); for 5 seconds
- CCA: 1,150A at 0°F (-18°C)
- CA/MCA: 1,370A at 32°F (0°C)
- HCA: 1,545A at 80°F (27°C)
- Reserve capacity: 205 minutes
- Short circuit current: 5,000A
- Deep cycling capability: 400 at 80% DOD
- Design life: 12 years
- Typical service life: 6 to 8 years

### PHYSICAL CHARACTERISTICS

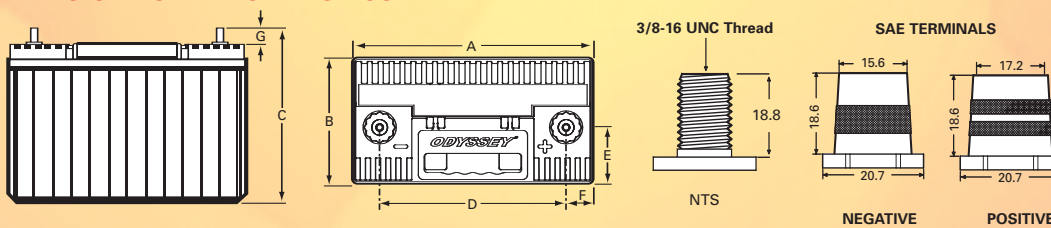

Nominal Dimensions, mm								
	A	B	C	D	E	F	G	Weight
WITHOUT METAL JACKET	330.2	172.7	239.0	255.9	77.0	53.8	22.4	77.8 lb
WITHOUT METAL JACKET	331.6	175.0	240.0	255.9	77.7	54.6	22.4	80.7 lb

Dimensions ± 0.533mm

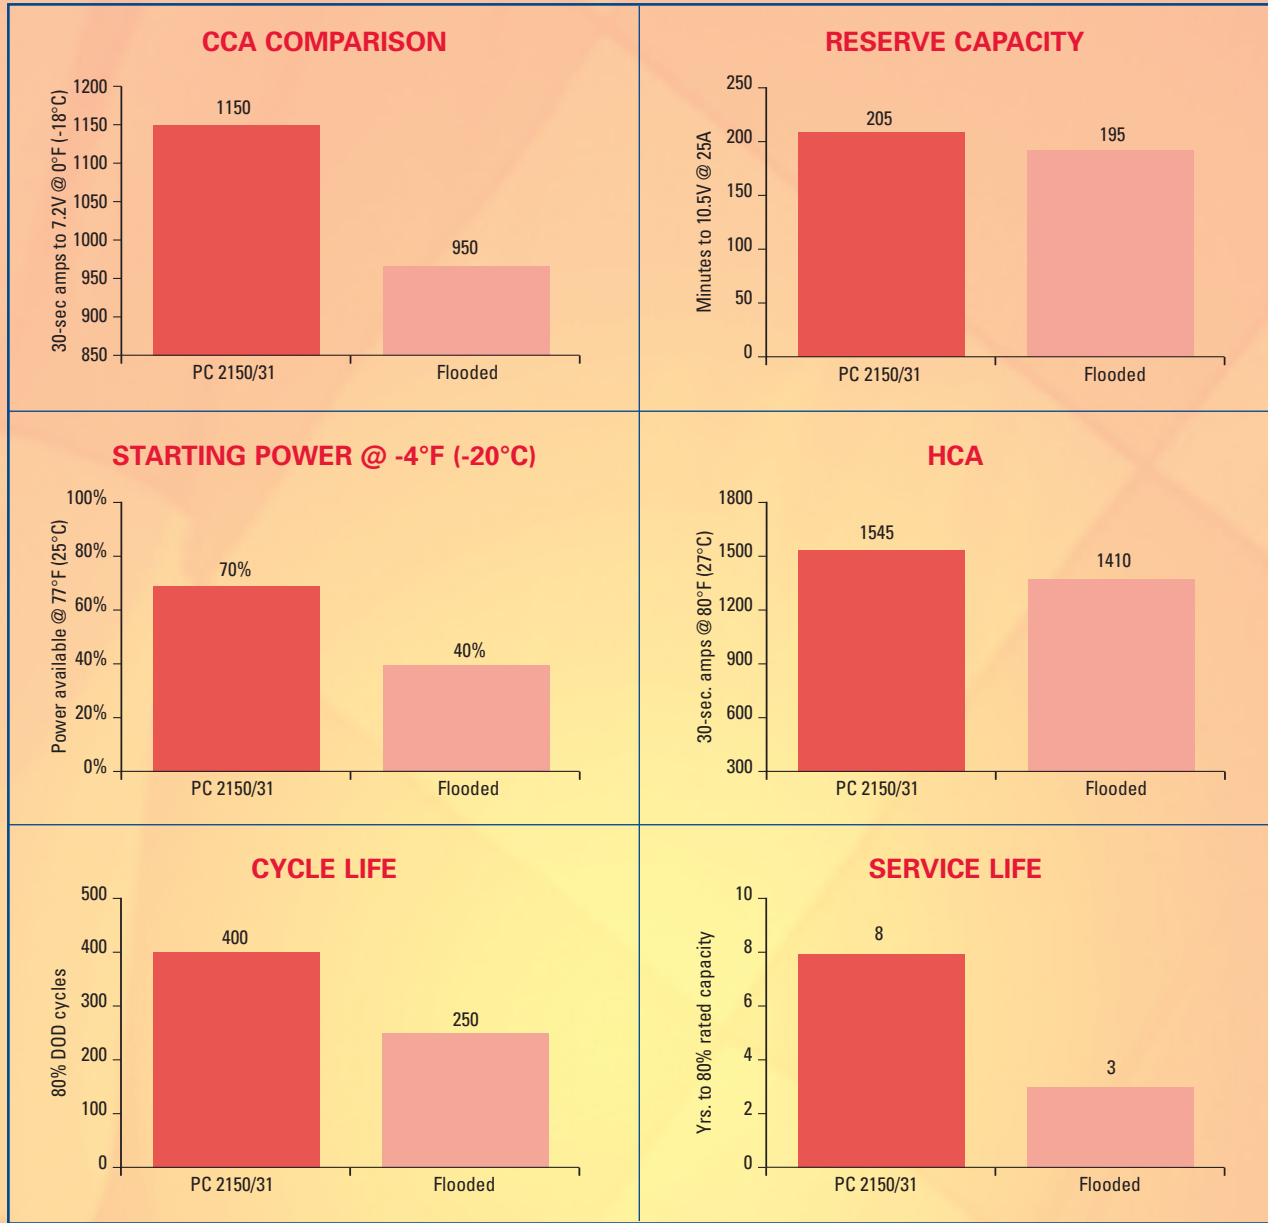

#### HIGH RATE DISCHARGE AT 77°F (25°C)

5 sec.	10 sec.	15 sec.	20 Sec.
2,150A	1,985A	1,800A	1,750A

#### EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

5 min	15 min	1 hr	3 hr	5 hr	10hr	20hr
437.0A	216.0A	73.0A	28.1A	17.8A	9.2A	5.0A



#### Regional Sales

**EnerSys Australia Pty Ltd**  
 7 Walker Place,  
 Wetherill Park, NSW,  
 Australia 2164  
 Tel: + 61 (0) 29756 1870  
 Fax: + 61 (0) 29757 4537  
 Toll-free: 1-800-550-153

**EnerSys Energy Products Inc.**  
 617 North Ridgeview Drive,  
 Warrensburg,  
 MO 64093-9301, USA  
 Tel: +1-660-429-2165  
 Fax: +1-660-429-1758

**EnerSys Limited**  
 Rake Lane,  
 Clifton Junction,  
 Manchester M27 8LR UK  
 Email: odyssey.sales@uk.enerSys.com  
 Tel: +44 (0)161 727 3952  
 Fax: +44 (0)161 727 3805

Distributed by:

**Website: [www.odysseyfactory.com](http://www.odysseyfactory.com)**

© 2007 EnerSys. All rights reserved.  
 Trademarks and logos are the property of EnerSys  
 and its affiliates unless otherwise noted.